


Burner Systems:

- EC-2-36(P)
- EC-2-48(P)
- EC-2-60(P)

Log Sets:

- MP-2-(36,48,60)
- Mammoth Pine

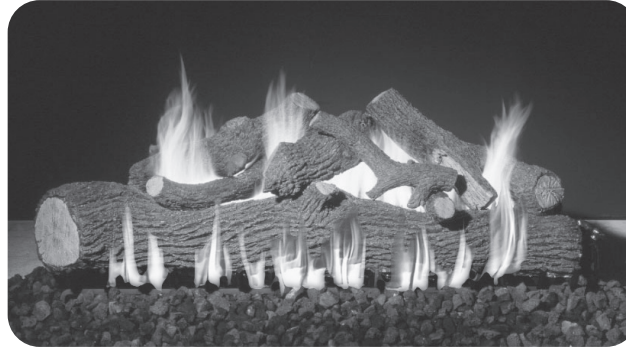

**COMPLIES to applicable
ANSI standards for
Vented Decorative
Appliances**

**FOR INSTALLATION IN
SOLID-FUEL BURNING
FIREPLACES***

EPIC SEE THRU VENTED GAS LOG SETS (MANUALLY LIGHTED)

WARNING

If the information in this manual is not followed exactly, a fire or explosion may result, causing property damage, personal injury, or loss of life.

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

WHAT TO DO IF YOU SMELL GAS:

- Open a window.
- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in the building.
- Immediately call the gas supplier from a neighbor's phone. Follow gas supplier's instructions.
- If you cannot reach the gas supplier, call the fire department.

Installation and service must be performed by a qualified professional service technician, service agency, or the gas supplier.

This appliance is only for use with the type of gas indicated on the rating plate.

IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION OF THE UNIT.

The Real Fyre gas log set is to be installed only in a solid-fuel burning fireplace with a working flue and constructed of noncombustible material. The installation, including provisions for combustion and ventilation air must conform with the National Fuel Gas Code, ANSI Z223.1/NFPA 54, or the CSA B149.1, Natural Gas and Propane Installation Code, and applicable local building codes.

A damper clamp is included to maintain the minimum permanent vent opening and to prevent full closure of the damper blade. **The chimney damper MUST be fully opened when burning the unit. The unit is designed to burn with yellow flames; thus adequate ventilation is absolutely necessary.**

To comply with certification, listings, and building code acceptances, and for safe operation and proper performance of this gas log set, you must use ONLY Peterson Real Fyre parts, decorative media, and accessories. Use of any other controls, parts, or accessories not designed for use with Real Fyre gas log sets is prohibited. This will void all warranties, certifications, listings, and building code approvals, and may cause property damage, personal injury, or loss of life. Peterson will not be liable for any damages caused by this misuse.

***Note:** Solid-fuels shall not be burned in a fireplace where a decorative appliance is installed.



We recommend that our gas hearth products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute® (NFI) as NFI Gas Specialists.

INSTALLER:

Leave this manual with the appliance.

CONSUMER:

Retain this manual for future reference.

TABLE OF CONTENTS

GETTING STARTED

| | |
|--|---|
| IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION..... | 3 |
| FIREPLACE OPERATING SAFETY INFORMATION..... | 4 |
| SPECIFICATIONS..... | 5 |
| <i>ASH LIP/RECESS REQUIREMENTS (if applicable)</i> | 5 |
| <i>GLASS DOOR REQUIREMENTS</i> | 6 |
| DAMPER CLAMP INSTRUCTIONS | 7 |
| EPIC BURNER SEE-THRU REPLACEMENT PARTS LIST..... | 8 |
| LOGS PARTS LIST..... | 9 |

INSTALLATION

| | |
|---|----|
| INSTALLATION..... | 11 |
| <i>INSTALL VALVE AND PILOT KIT (L.P. Models Only)</i> | 11 |
| <i>INSTALL BURNER</i> | 11 |
| <i>HEAT SHIELD PLACEMENT (L.P. models only)</i> | 12 |
| <i>LAVA COALS</i> | 12 |
| <i>LOG SET PLACEMENT</i> | 13 |

USE, CARE, & SERVICE

| | |
|--|----|
| LIGHTING INSTRUCTIONS..... | 15 |
| <i>FOR YOUR SAFETY, READ BEFORE LIGHTING</i> | 15 |
| <i>TO SHUT OFF GAS TO THE APPLIANCE</i> | 15 |
| CLEANING AND SERVICING | 16 |
| <i>ADJUSTING AIR SHUTTERS</i> | 16 |
| FLAME DESCRIPTION | 16 |
| NOTES PAGE..... | 17 |
| TROUBLESHOOTING..... | 18 |
| WARRANTY | 20 |

IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION

CAUTION: Installation and repair must be done by an NFI Certified or other qualified professional installer.

Installer: Carefully read these instructions before installing this gas burner system. Be sure you understand all safety precautions and warnings contained in this manual.

- A. **BE CAREFUL:** If not installed, serviced, and used correctly per these instructions, this product can cause serious personal injury, property damage, or loss of life.
- B. **A shut-off valve (not included) in the gas supply line is required.** It must be installed upstream of the unit and must be easily accessible. The shut-off valve cannot be located in the fireplace firebox. Refer to the NFPA 54 guidelines for further details.
- C. A sediment trap in the gas supply line is recommended where applicable. It should be installed downstream of the shut-off valve as close to the unit as possible. Refer to the NFPA 54 guidelines for further details.
- D. **WARNING:** When installing in a solid-fuel-burning fireplace, **the chimney flue, damper, and firebox must be thoroughly CLEANED** of soot, creosote, ashes, and loose paint, and must be inspected by a qualified chimney cleaner. Some older fireplaces may need repair prior to installing this appliance.
- E. The fireplace floor must be level and smooth.
- F. This appliance is only for use with the type of gas indicated on the rating plate. This appliance is **NOT FIELD CONVERTIBLE** for use with other gasses.

CHECK GAS TYPE (natural or L.P.): The gas supply must be the same as stated on your burner system rating plate. If gas supply is different, **DO NOT INSTALL**. Contact your dealer for immediate assistance.

- G. **INSUFFICIENT GAS PRESSURE WILL KEEP THE UNIT FROM OPERATING PROPERLY. DO NOT USE IF GAS PRESSURE IS LOWER THAN THE MINIMUM REQUIREMENT.**
- H. The *minimum* inlet gas-supply pressure for purposes of input adjustment is **7"** water column (w.c.) on **natural gas** and **11"** w.c. on **L.P. gas**. Insufficient gas pressure will affect proper operation of the unit. Do not install this gas appliance if minimum pressure is not available. The *maximum* inlet gas-supply pressure is **10.5"** w.c. on natural gas and **13"** w.c. on L.P. gas. **The L.P. source must be regulated, located outside, and hard-lined in (rigid pipe must come into the fireplace). DO NOT connect this appliance to an unregulated L.P. gas tank/cylinder. DO NOT locate the tank/cylinder inside of the home. DO NOT run a rubber hose or flex connector into the fireplace. Failure to follow these requirements can cause an explosion, property damage, personal injury, or loss of life.**
- I. **The gas piping system must be sized to provide minimum inlet pressure at the maximum flow rate (BTU/hr).** Undue pressure loss will occur if the pipe is too small, or the run is too long. Gas supply pipe must be 1/2" minimum interior diameter. If the gas line is longer than 20', a larger diameter line may be necessary. Refer to the NFPA 54 guidelines for further details.
- J. Input ratings shown in BTU per hour are for elevations up to 2,000 ft. For elevations above 2,000 ft., refer to the National Fuel Gas Code or contact manufacturer before installing this product.
- K. This gas appliance and its main gas valve must be disconnected from the gas-supply piping system during any pressure testing of that system at test pressures in excess of 1/2 psig.
- L. This gas appliance must be isolated from the gas-supply piping system by closing the gas supply shutoff valve during any pressure testing of the gas-supply piping system at test pressures equal to or less than 1/2 psig.
- M. **To install the gas appliance in your fireplace, the fireplace MUST meet the minimum size requirements (see product specifications table in SPECIFICATIONS section).**
- N. This appliance may be installed in an aftermarket, permanently located, manufactured (mobile) home, where not prohibited by local codes. Installation of appliances designed for manufactured home (U.S. only) or mobile home installation must conform with the Standard CAN/CSA Z240 MH, Mobile Housing, in Canada, or with the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280, in the United States, or when such a standard is not applicable, ANSI/NCSBCS A225.1/NFPA 501A, Manufactured Home Installations Standard.
- O. **DO NOT install this burner system in a fireplace with an ash lip or recess greater than 3/4".**
- P. If this burner system is installed in a fireplace with **glass doors**, and the doors have a frame that obstructs airflow to the fireplace floor, the frame **MUST** have slots (above the fireplace floor) that allow adequate ventilation. The opening (with doors fully open) **MUST** meet the minimum fireplace size front width and height requirements. The glass doors **MUST** be fully open when the burner is in operation. See the SPECIFICATIONS section for details.

FIREPLACE OPERATING SAFETY INFORMATION

- A. Adults **MUST** be present when this gas appliance is operating. This appliance **MUST NOT** be left burning when unattended or while anyone is sleeping.
- B. Keep the area of the gas burner system clear and free from combustible materials, gasoline, and other flammable vapors and liquids.
- C. DO NOT use this appliance if any part has been underwater. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control that has been underwater. Attempted operation may result in fire or explosion resulting in property damage, personal injury or loss of life.
- D. **A fireplace screen must be in place when the system is burning.** Provisions for adequate combustion air must be maintained. Unless other provisions for combustion air are provided, the screen shall have an opening(s) for introduction of combustion air. Combustion air is adequate when all flames curl into the fireplace and away from the screen. **When a glass fireplace enclosure (door) is used, the glass doors MUST be fully open when the burner is in operation.**
- E. Do not remove the rating plates or the warning tags. These are an integral safety and identification component of this appliance.
- F. Be sure to read the CLEANING AND SERVICING and FLAME DESCRIPTION sections.

SPECIFICATIONS

Real Fyre gas burner systems must be installed only in a wood burning fireplace with the minimum firebox dimensions and venting requirements met (see following tables). This appliance is designed to burn with yellow flames; adequate ventilation is absolutely necessary.

Product Specifications

| Model | Minimum Fireplace Size | | | BTU Rating | |
|---------|------------------------|---------|--------|------------|----------|
| | Width * | Depth † | Height | Nat. Gas | L.P. Gas |
| EC-2-36 | 48" | 24" | 36" | 190k | 180k |
| EC-2-48 | 62" | 24" | 36" | 215k | 190k |
| EC-2-60 | 72" | 24" | 36" | 260k | 190k |

Important Information Regarding Dimensions

* This required width allows for centering of the unit.

† If an ash lip exists, the depth requirement begins inside of the lip (see Fig. 5-1 below).

Table 1 - Product Specifications

ASH LIP/RECESS REQUIREMENTS (if applicable)

- DO NOT install this burner system in a fireplace with an ash lip or recess greater than 3/4".
- The depth (as indicated in the chart above) begins inside of the lip.

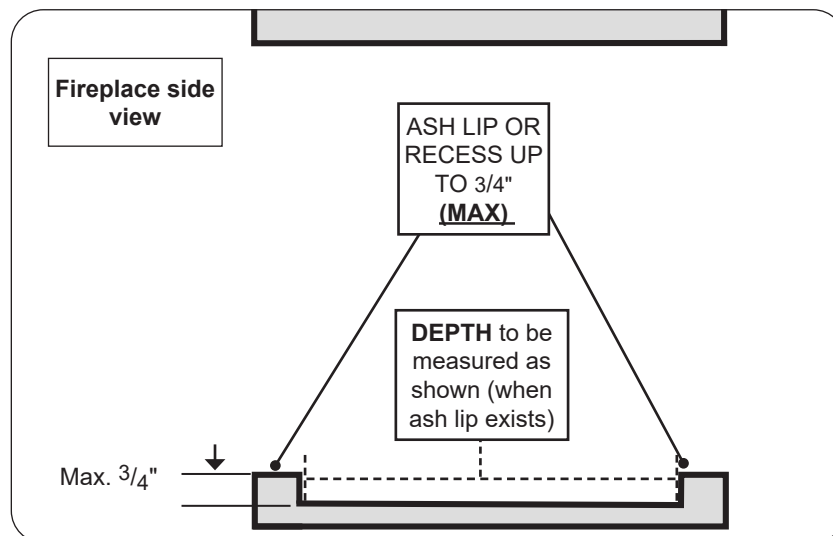


Fig. 5-1 Ash lip/recess detail

GLASS DOOR REQUIREMENTS

If this burner system is installed in a fireplace with glass doors, and the door frame bottom is greater than 3/4" in height, the frame MUST have slots (above the fireplace floor) that allow adequate ventilation. This prevents airflow obstruction (to the fireplace floor). See Fig. 6-1.

Note: The doors can be installed in front of an ash lip (that meets the requirements on the previous page).

Important: The opening (with doors fully open) MUST meet the minimum fireplace size front width and height requirements. See the Table on the previous page and Fig. 6-1.

Important: The glass doors MUST be fully open when the burner is in operation.

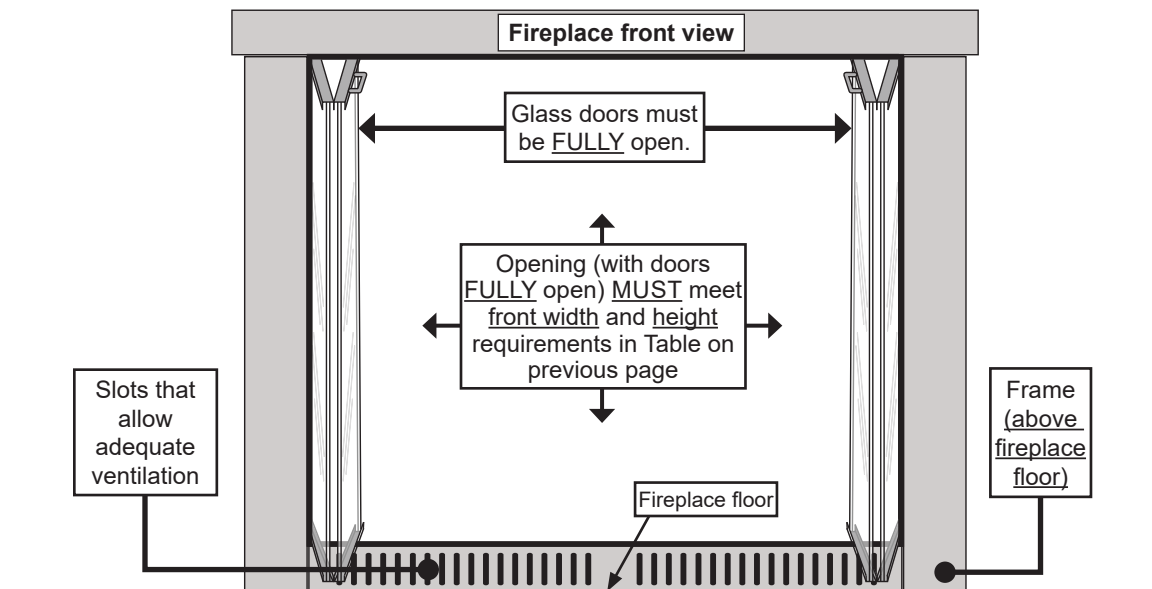


Fig. 6-1 Correct glass-doors frame setup, ventilation, and use (if applicable)

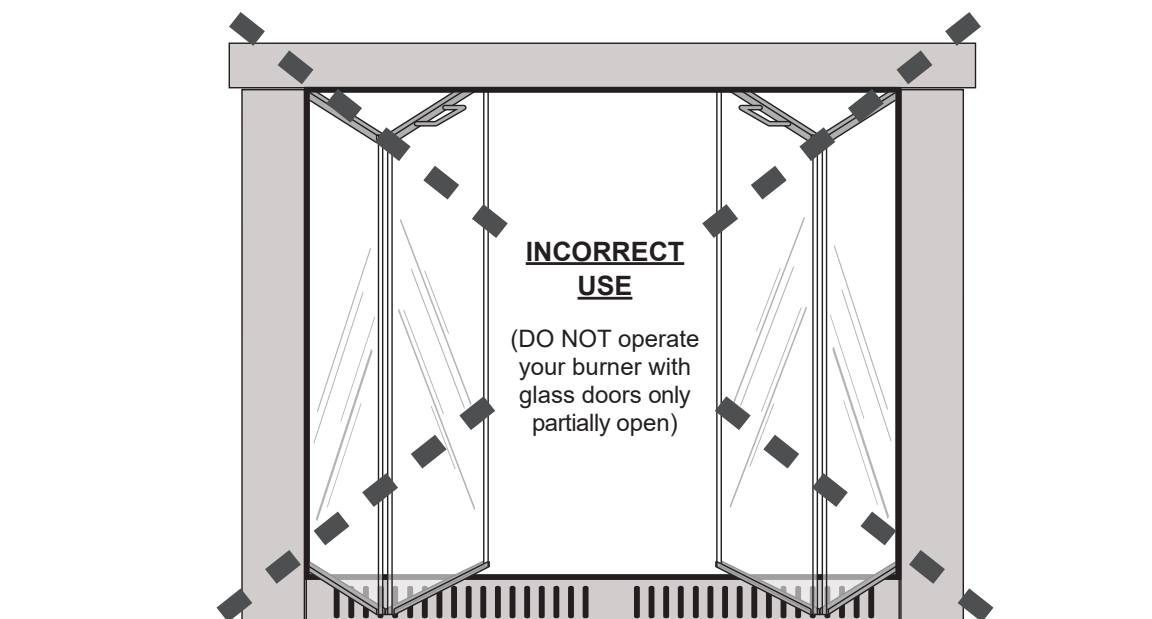


Fig. 6-2 Incorrect glass-doors frame setup, ventilation, and use (if applicable)

DAMPER CLAMP INSTRUCTIONS

The damper clamp with hex bolt (Fig. 7-1) is provided as a means to prevent full closure of the damper blade. The clamp is easily attached to most damper blades with pliers or a wrench, and must be permanently installed. The clamp is designed to prevent accidental closure of the damper when installed as illustrated (Fig. 7-2). Should the clamp not fit, or fail to provide the permanent vent opening listed in Table 3 below, have a permanent stop installed, remove the damper blade, or have the damper cut to provide the minimum permanent opening required.




Fig. 7-1 Damper clamp detail

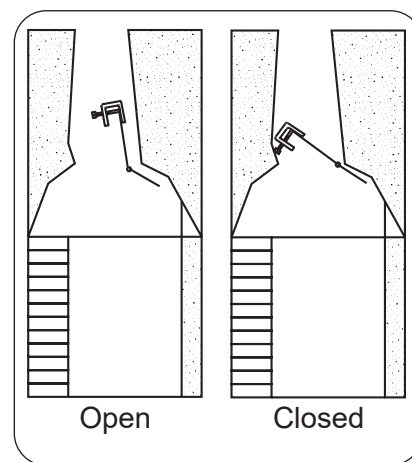


Fig. 7-2 Damper open / closed

Venting Requirements

Note: The minimum chimney height from hearth to top of chimney is 15'.


| Minimum permanent free opening area of chimney damper for venting (sq. in.) | | | |
|---|-----|-----|-----|
| For factory-built fireplaces | | | |
| Chimney height | 36" | 48" | 60" |
| 15' | 96 | 109 | 136 |
| 20' | 88 | 101 | 128 |
| 30' | 79 | 92 | 119 |
| For masonry-built fireplaces | | | |
| 15' | 106 | 119 | 146 |
| 20' | 98 | 111 | 138 |
| 30' | 89 | 102 | 129 |

Table 2 - Minimum Chimney Damper Vent Opening Requirements

THESE ARE MINIMUM DAMPER OPENING SPECIFICATIONS.

THE DAMPER MUST BE COMPLETELY OPENED WHEN OPERATING THIS GAS APPLIANCE TO ACHIEVE THE BEST VENTILATION POSSIBLE.

EPIC BURNER SEE-THRU REPLACEMENT PARTS LIST

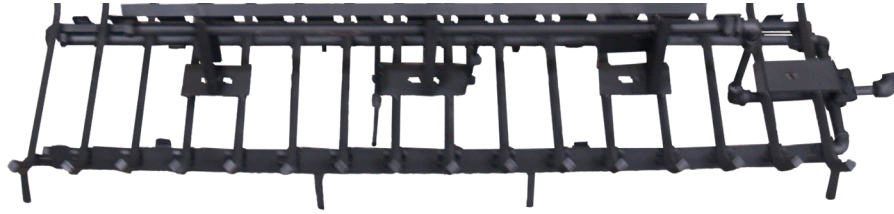

60" burner model shown



Note: Photos not to scale

Replacement parts can be ordered from your local Real Fyre dealer.

For 36" propane models, refer to the separate PARTS LIST supplied with the SPK-26 pilot kit.

| Item | Description | 36" model | | 48" model | | 60" model | |
|------|--|------------|------|------------|------|------------|------|
| | | Part No. | Qty. | Part No. | Qty. | Part No. | Qty. |
| 1. | Flex connector (w/ adapter), 1/2" O.D. x 24" | CK-5-24-SP | 1 | CK-5-24-SP | 1 | CK-5-24-SP | 1 |
| 2. | Damper clamp | DC-1 | 1 | DC-1 | 1 | DC-1 | 1 |

LOGS PARTS LIST


Note: The log set is purchased and packaged separately; contact your local dealer when ordering.

MP-2-36 PARTS LIST


MPL-18TY



MPL-20T



MPL-24T




MPL-17T



MPL-36BF




MPL-36BF



MP-2-48 PARTS LIST


MPL-24T



MPL-17T




MPL-18TY



MPL-18T




MPL-19T




MPL-21T




MPL-48BF

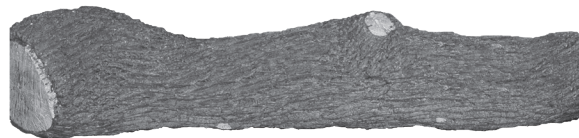

MPL-48BF

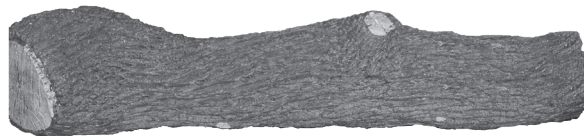

**MP-2-60
PARTS LIST**

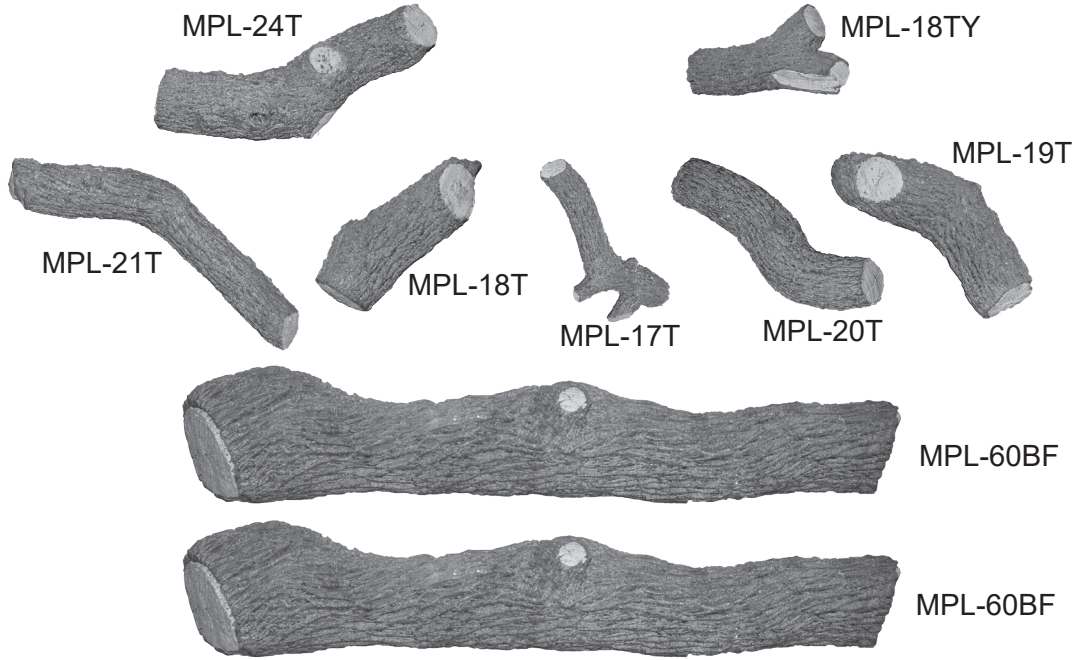

INSTALLATION

The Real Fyre burner system must be installed by a qualified professional service technician. Instructions must be followed carefully to ensure proper performance and full benefit from the burner system. **Check to be sure the burner system is designed and labeled for the type of gas (natural or propane gas) supplied to fireplace. Fireplace floor must be level, clean, and smooth (see FIREPLACE SAFETY INFORMATION section).**

WARNING: Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

REFER TO THE PARTS LIST WHEN FOLLOWING INSTALLATION INSTRUCTIONS.

INSTALL VALVE AND PILOT KIT (36" L.P. Models Only)

For 36" L.P. models, the valve and pilot assembly must first be installed. Reference the instructions supplied with the pilot kit for overall installation, but take note of the details below, and refer to Fig. 11-1.

- Use pipe compound resistant to all gasses on the nipple found on the right side of the burner.
- The flame diverter bracket is not applicable.
- Use the two screws pre-installed on the pilot assembly to fasten the pilot to the bracket found on the burner assembly (discard the small bracket that comes loose from the pilot assembly).

INSTALL BURNER

1. MAKE SURE FIREPLACE GAS SUPPLY IS TURNED OFF.
2. Locate the gas-supply stub inside the fireplace and remove the cap, if attached.

CAUTION: When removing the cap, make sure the stub does not turn, loosening the connection inside the wall.

3. Remove the small adapter connected to the flex connector (included). Attach the adapter to the nipple found on the side of the burner (or rear of valve) using a pipe compound resistant to all gasses. Tighten securely. Then attach the flex connector to the adapter. Tighten securely.
4. Place the burner system in the fireplace. Center the burner from left to right in the fireplace.
5. **Be sure gas to the fireplace is off.** Remove the large adapter connected to the other end of the flex connector. Attach the adapter to the gas-supply stub using a pipe compound resistant to all gasses. Tighten securely. Then attach the open end of the flex connector to the adapter. Tighten securely.
6. **LEAK TEST:** Follow the appropriate LIGHTING INSTRUCTIONS for your model to ignite the burner. Test at all connections for leaks using the appropriate soapy water solution. If bubbles appear, a leak is present. Turn off the gas and tighten at all connections. Repeat until no leaks are present. If a leak persists, turn off the valve and/or gas supply and contact the local gas company or dealer. **NEVER USE A FLAME TO CHECK FOR LEAKS.**

Turn off the gas supply and allow unit to completely cool prior to proceeding.

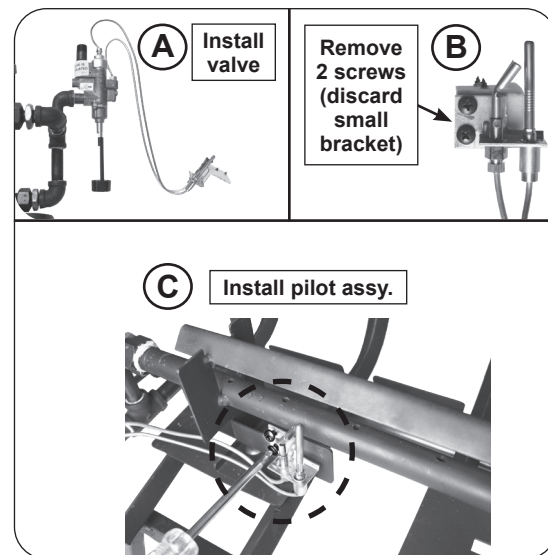


Fig. 11-1 Install valve assy. (36" L.P. models only)

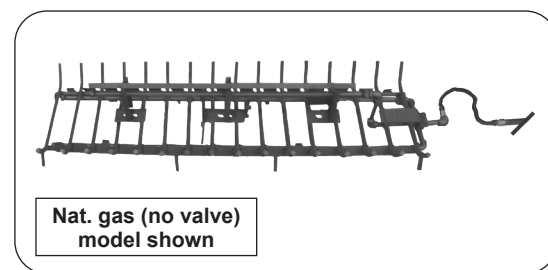


Fig. 11-2 Connect gas supply

Installation continued on next page

HEAT SHIELD PLACEMENT (L.P. models only)

TO PREVENT DAMAGE AND FAILURE:

IT IS CRITICAL THAT THE HEAT SHIELD BE PLACED CORRECTLY OVER THE VALVE PRIOR TO OPERATION, REFER TO THE INSTRUCTIONS SUPPLIED WITH THE PILOT KIT.

LAVA COALS

Lava coals are supplied (with the mammoth pine log set) for decorative purposes. Follow the steps below.

1. Spread the lava coals on the floor of the fireplace, around all sides of the burner system (see Fig. 12-1).

Note: DO NOT place any lava media on the burner system. If a pilot kit has been installed, DO NOT place any lava media on or within the heat shield, or under the knob (at front of valve).

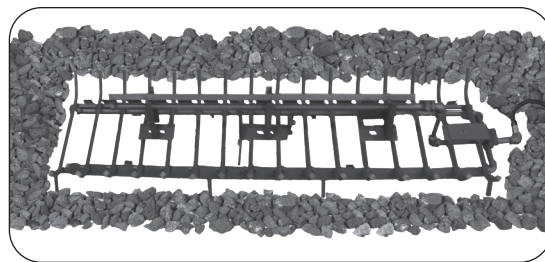


Fig. 12-1 Place lava coals


Installation continued on next page

LOG SET PLACEMENT

- Read all safety warnings and important information in this manual to ensure proper placement.
- The logs are heavy and require two or more people to handle. Exercise extreme care during placement.

All models begin with the bottom log placement shown below. To complete log placement continue to the following section specific to your log set size.

Common Placement Steps

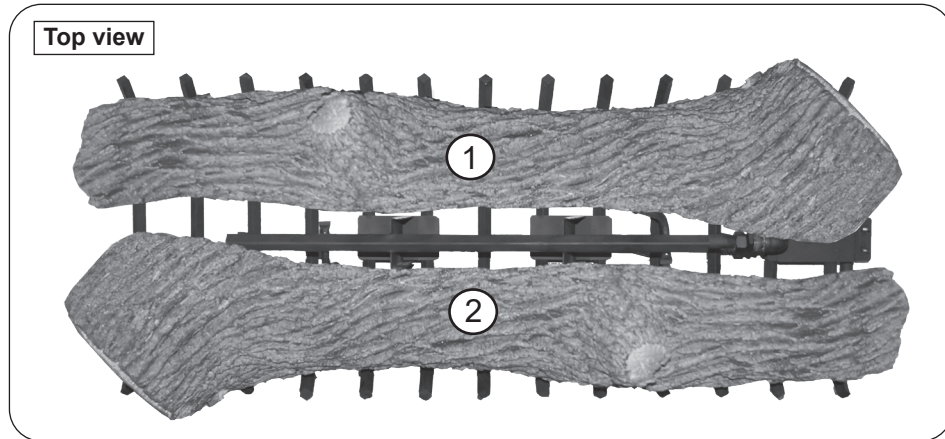


Place front logs as shown.


CONTINUE TO THE FOLLOWING SECTION SPECIFIC TO YOUR LOG SET SIZE.

INSTALLATION (cont.)

36" Log Sets

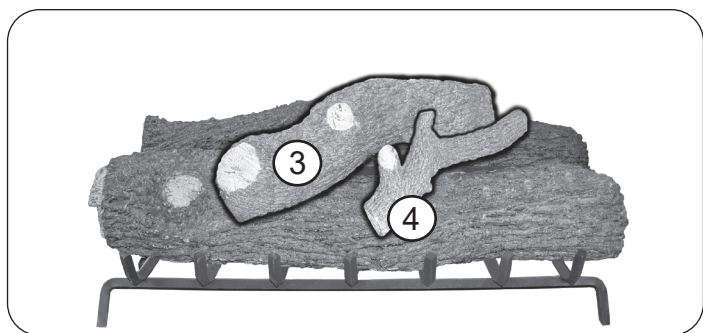


Place top logs 3-4 as shown.

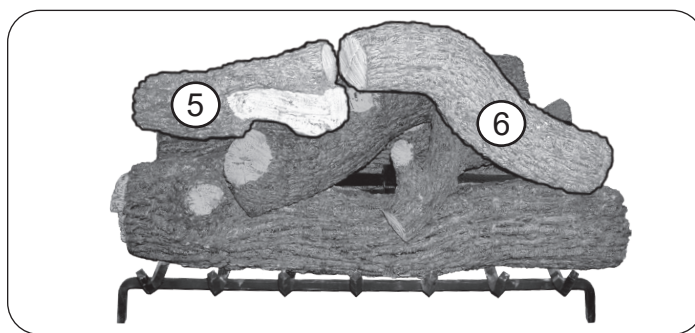


Place top logs 5-6 as shown.

48" Log Sets

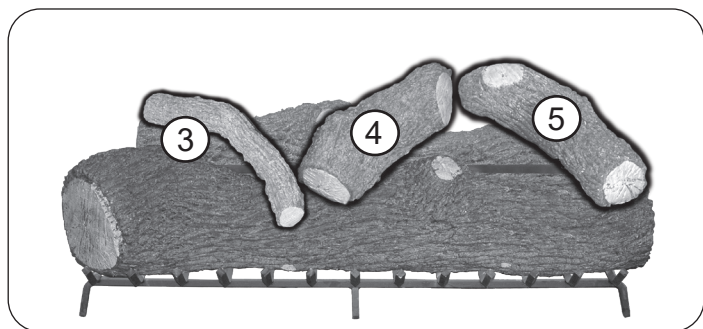


Place top logs 3-5 as shown.

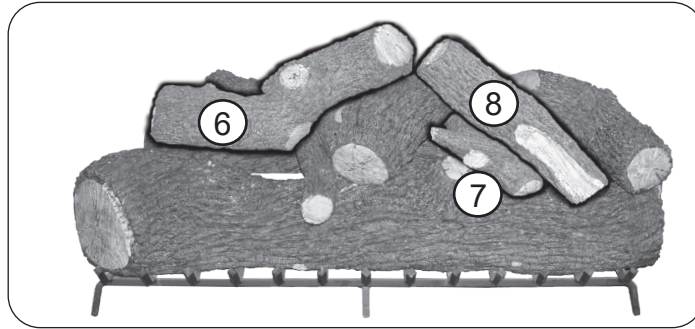


Place top logs 6-8 as shown.

60" Log Sets

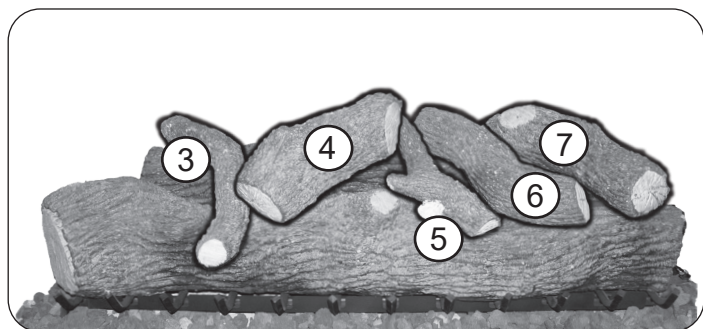

Place top logs 3-7 as shown.

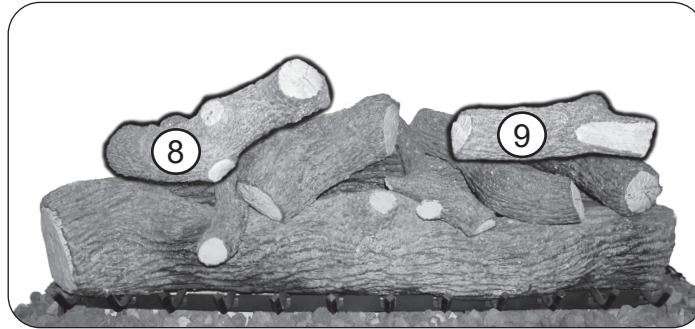

Place top logs 8-9 as shown.

Important: Adequate ventilation is absolutely necessary! Provided significant, noticeable sooting does not occur, some flexibility is possible in log placement to suit your individual preference. If you experience a continued accumulation of black carbon (soot) on your logs it is an indication of incomplete combustion and you should move the effected log(s) so as to minimize the flame contact on the effected log(s). Read the instructions supplied with the log set completely and carefully.

CAUTION: BURN HAZARD! Logs will remain hot for some time after use. If you need to reposition any log to maintain the proper layout, use heat-resistant gloves or allow logs adequate time to cool before handling.

LIGHTING INSTRUCTIONS

FOR YOUR SAFETY, READ BEFORE LIGHTING

WARNING: If you do not follow these instructions exactly, a fire or explosion may result causing property damage, personal injury or loss of life.
Be cautious around all hot surfaces.

- A. **BEFORE LIGHTING**, smell all around the unit area for gas. Be sure to smell next to the floor, because some gas is heavier than air and will settle on the floor.
- B. **WHAT TO DO IF YOU SMELL GAS**
 1. Shut off the gas to the appliance.
 2. Extinguish any open flame.
 3. If odor continues, immediately call your gas supplier or the fire department.
- C. Use only a proper key to turn the gas line valve. Never use tools. If the valve will not turn, **DO NOT** try to repair it. Call a qualified professional service technician. Force or attempted repair may result in fire or explosion.

If your burner is operated by a pilot kit, carefully follow the lighting instructions supplied with your pilot kit.

1. **STOP!** Read the safety information above.
2. Ensure the key valve is completely in the **OFF** position before beginning lighting sequence.
3. Light a long-stem match or a long-necked butane lighter, and place the flame against the right side of the top burner (Fig. 15-1).
4. **Once the flame is in position**, slowly turn the key valve counter-clockwise toward the **ON** position until it no longer rotates (see Fig. 15-2). Your burner should light.

WARNING: If the burner does not light within (5) seconds of turning on the key valve, immediately turn the key valve clockwise toward the **OFF** position until it no longer rotates.

Wait approximately five (5) minutes to clear out any gas, and repeat steps 3-4 above.

If your burner fails to light again, turn the key valve clockwise toward the **OFF** position until it no longer rotates and contact your dealer or gas supplier.

Note: The flame height can be adjusted via the key valve.

TO SHUT OFF GAS TO THE APPLIANCE

To extinguish your gas burner, turn the key valve clockwise toward the **OFF** position until it no longer rotates (see Fig. 15-2). Be sure the key valve is turned fully off to avoid any gas leakage.

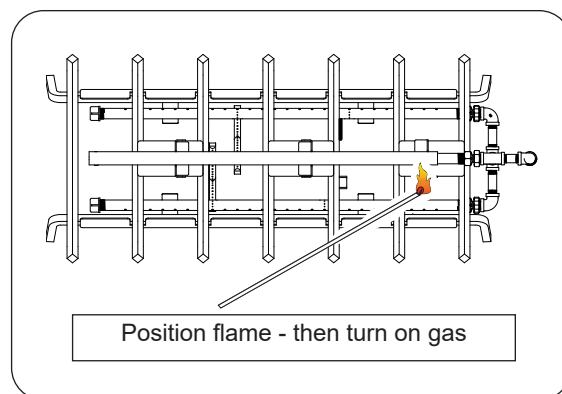


Fig. 15-1

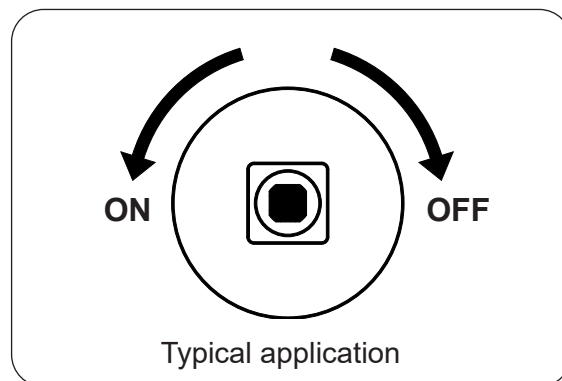


Fig. 15-2

CLEANING AND SERVICING

Note: Discoloration is common on the grate after burning.

Note: Servicing may be necessary to ensure proper operation and burn characteristics.

Always shut off the gas to the appliance while performing service work.

Allow the appliance to cool before servicing.

Installation, service, and repair must be done by an NFI Certified or other qualified professional service technician. The appliance should be examined before use, and must be inspected at least annually to prevent burner shutdown, sooting, odors, etc. It must be checked for clean burning operation with the correct tools to service this unit. More frequent servicing may be required. It is imperative that all components and compartments, burner(s), and circulating air passageways of the appliance be kept clean and free of all obstructions (as applicable).

In addition, a periodic examination and cleaning of the fireplace venting system should be conducted by a qualified professional service technician.

Any safety screen or guard removed for servicing must be replaced prior to operating this appliance.

Verify proper operation after servicing.

If, after a period of use, the flames start to exhibit unusual shapes and behavior, or the burners fail to ignite smoothly, the burner may require cleaning or servicing. If this happens, it is recommended to contact the nearest dealer to get the appliance serviced.

DO NOT remove the rating plates or the warning tags. These are an integral safety and identification component of this appliance.

We recommend following these instructions at the beginning of each fireplace season and as needed throughout the year, depending on your usage pattern and the environmental conditions in your home. More frequent cleaning and maintenance may be necessary when burning propane gas than with natural gas.

ADJUSTING AIR SHUTTERS

Burners are equipped with air shutters for the upper (except 60") and front burners. Adjust the size and color of the flame by opening (turn outward) or closing (turn inward) as shown in Fig. 16-1.

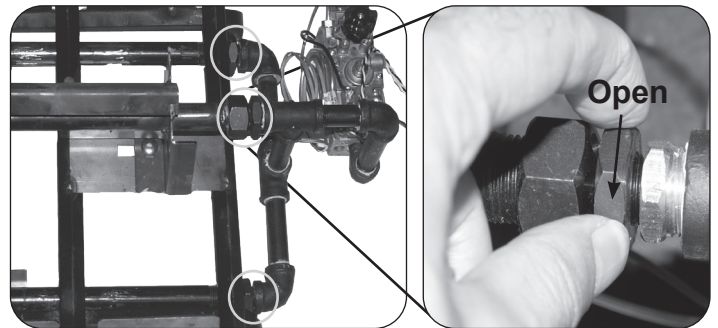


Fig. 16-1 Adjusting air shutter

FLAME DESCRIPTION

Observe the flames. The main burner flames should be blue at the base and a combination of blue/yellow at the body and at the tips. They should be approximately 5-8" above the logs, with the center flame being the tallest. See 16-2 for example.

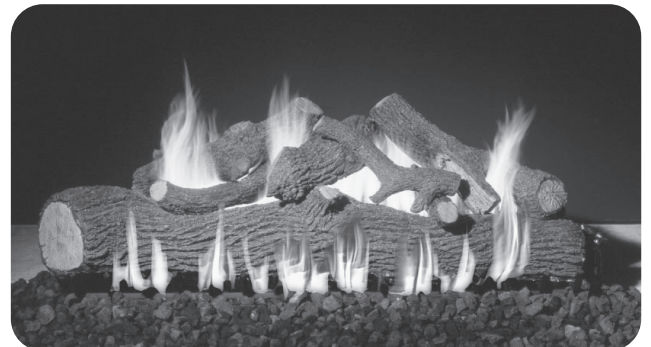


Fig. 16-2 Flame appearance

Please use this page to record any information that you may want to have at hand.

TROUBLESHOOTING

| POSSIBLE CAUSE | SOLUTIONS |
|---|---|
| 1 BURNER SHUTTING DOWN DURING OPERATION | |
| A. Insufficient or excessive gas pressure | A1. Check gas pressure (Read D.- F. of IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION section, & check with local gas company). A2. Other gas appliances may be on the same gas line, dropping gas pressure to the burner. Check pressures with everything operating to ensure adequate pressure. |
| B. Fireplace too small for unit | B. Ensure minimum requirements are met (see SPECIFICATIONS section). |
| C. Blockages on burner | C. Vacuum any lava granules or material that may have fallen onto burner port area. |
| 2 LOW FLAME HEIGHT | |
| A. Gas pressure | A. Check gas pressure (see Section 1, A1 of this table). |
| B. Key valve not fully open | B. Open key valve fully. |
| C. Blockage or kink in flex connector kit, plumbing, or burner orifice | C. Clean out blockage. If flex connector is kinked, replace it. |
| 3 BURNER NOT BURNING EVENLY | |
| A. Burner ports clogged | A. Clean burner ports. |
| B. Top burner lights; bottom burner has delayed ignition | B1. Check gas pressure. Can be caused by too small of a gas line (see Section 1, A1 of this table). B2. Low propane tank level. Vacuum burner tube for soot blockage and fill propane tank. |
| 4 ODORS | |
| A. Gas leak | A. Shut off gas, if possible. Follow instructions on front page. Have a qualified professional installer or the gas company correct all leaks. |
| B. New home, new carpet, or new paint | B. When these odors are drawn into the fireplace, this may cause objectionable odors. Thoroughly ventilate the area before restarting your burner system. |
| C. Damper not properly open, or closed | C. Ensure that damper is <u>fully</u> open. |

5**SMOKING AND/OR SOOTING**

| | |
|---|---|
| A. Poor draft or downdraft | A. Check for chimney blockage. Be sure chimney is at least 3' taller than anything within 10' of it in all directions. If not, consult a chimney sweep. A chimney cap or fan may help. |
| B. Damper not properly open, or closed | B. Ensure that damper is <u>fully</u> open. |
| C. Burner is positioned too close to the front of the firebox | C. Move burner system to the center of the firebox. |
| D. Improper media placement | D. See INSTALLATION section for proper media placement. |
| E. Air shutter(s) closed (if applicable) | E. Open air shutter(s) as needed. |
| F. Air shutter(s) blocked with debris (if applicable) | F. Vacuum debris away from air shutter(s). |
| G. Log placement | G. See solution in Section 1, B. |
| H. Using natural-gas burner on propane gas or propane gas on natural gas | H. If the gas listed on the nameplate does not match the gas you are burning, shut down the burner system immediately. Then call your dealer. |
| I. Adding any accessories to burner system | I. Shut down burner system and take off any accessories that do not belong with the system. |

6**FLAME AT AIR MIX / ORIFICE (PROPANE MODELS)**

| | |
|--------------------------------|---|
| A. Burner ports clogged | A. Clean burner ports. |
| B. Gas pressure | B. Check gas pressure (see Section 1, A1 of this table). |

WARRANTY

PETERSON VENTED DECORATIVE GAS APPLIANCE LIMITED WARRANTY

R.H. Peterson Co. ("RHP") warrants your Real Fyre® vented decorative gas appliance to be free from defects in material and workmanship. RHP vented refractory gas logs are warranted for **as long as the original purchaser owns them (lifetime) when used indoors and for THREE (3) YEARS when used outdoors.** RHP vented fiber-ceramic blended gas logs are warranted for **FIVE (5) YEARS when used indoors and for THREE (3) YEARS when used outdoors.** RHP **indoor** vented gas log burners and stainless steel burners (excluding controls) are warranted for **TEN (10) YEARS.** RHP **outdoor** vented stainless steel burners (excluding controls) are warranted for **FIVE (5) YEARS.** The **SPK-26** is warranted for **THREE (3) YEARS** and **APK-17** (including -17 valve) is warranted for **TWO (2) YEARS.** All other valves, pilots, and controls are warranted for **ONE (1) YEAR** (excluding batteries). RHP glass, gems, and nuggets are warranted for **TEN (10) YEARS.**

A COPY OF YOUR SALES SLIP FOR PROOF OF PURCHASE IS REQUIRED

This warranty applies to the original purchaser for products which are installed in the United States or Canada and which are operated and maintained as intended for single family residential usage. This warranty is valid only with proof of purchase, commences on the date of purchase, and terminates (both as to original and any replacement products) on the anniversary date of the original purchase of the product per the above schedules.

This warranty covers defects in material and workmanship. This warranty **does not** cover parts which become defective as a result of negligence, misuse, use not in compliance with the Installation and Owner's Manual, accidental damage, improper handling, improper storage, improper installation, **lack of required routine maintenance** (as specified in the Installation and Owner's Manual), electrical damage, local gas impurities or failure to protect against combustible materials. Product must be installed (and gas must be connected) as specified in the Installation and Owner's Manual by a **qualified professional installer.** This warranty **does not** apply to rust, corrosion, oxidation, or discoloration unless the affected part becomes inoperable. RHP products including valves, pilots and controls, are designed and certified to be used as a system. Modifications to products which are not specifically authorized will void this warranty and could render the product to be unsafe. Burners, valves, parts, accessories, remotes, etc. used with this product must be RHP products or this warranty is void. Warranted items will be repaired or replaced at RHP's sole discretion. This warranty **does not** cover labor or labor related charges, except as provided by separate specific written programs from RHP. All repair work must be performed by a qualified professional service person and requires prior approval of RHP. RHP may require the defective product or part to be returned to the factory to determine the cause of failure. RHP will pay freight charges if the product or part is determined to be defective. This warranty does not cover breakage in shipment from our independent distributor to its customer if the damage is determined to have occurred during that shipment.

This warranty specifically excludes liability for **indirect, incidental,** or consequential damages. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specified legal rights, and you may have other rights that vary from state to state or province.

For additional information regarding this warranty, or to place a warranty claim, contact the RHP dealer where the product was purchased.

When contacting your RHP dealer or the R.H. Peterson Co., please provide the following information:

- Your name, address, telephone number, e-mail
- Sales receipt showing where purchased and date purchased
- Model number, serial number of product, date code
- Relevant information: installer, additions, repairs, when defect was first noted

**TO REGISTER YOUR PRODUCT ONLINE GO TO: WWW.RHPETERSON.COM,
AND CLICK ON PRODUCT REGISTRATION. THANK YOU FOR YOUR PURCHASE.**

| | | | | | | |
|------------------------|-------------|-------------|--------------------|--------------------|---------------------|-------|
| Quality Check | | | Date: _____ | | | |
| Burner Orifices | Nat. | L.P. | Leak Test: | _____ | Model#: | _____ |
| Main: | _____ | _____ | Burn Test: | _____ | Serial#: | _____ |
| Other: | _____ | _____ | Gas Type: | <u>Nat. / L.P.</u> | Air Shutter: | _____ |
| | | | | | Inspector: | _____ |